


REFERING TO "TOWN OF LADYSMITH WATERWORKS",
LETTERING SHALL BE 25 FLATTENED FACE
GOTHIC WITH FACE OF LETTERS RAISED TO THE
SAME LEVELS AS THE TOP OF THE RIBS

MANUFACTURES SYMBOL 90 MAXIMUM DIMENSION,
CIRCLE OR SQUARE

21 ϕ HOLE

PLAN

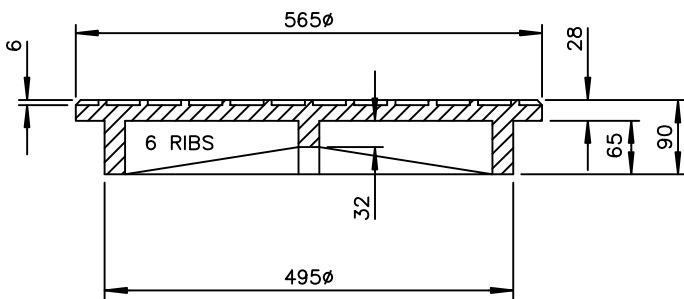

COVER



FRAME

FRAMES INSTALLED ON 600 ϕ BARRELS
SHALL NOT HAVE RIB

NOTES:

1. ALL CASTINGS SHALL BE CERTIFIED TO MEET CS600 REQUIREMENTS
2. ALL METAL BEARING SURFACES BETWEEN FRAME, COVER AND RISER RINGS MACHINED FOR NON ROCKING FIT IN ALL POSITIONS. ALLOW 1.5 RAISED FACE IN CASTING FOR MACHINING
3. ONLY PRODUCTS APPROVED BY THE TOWN ENGINEER WILL BE ACCEPTED FOR INSTALLATION

DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED



TOWN OF LADYSMITH
ENGINEERING STANDARD

HEAVY DUTY MANHOLE
COVER AND FRAME

DATE: FEB. 1994

APP. BY:

DRAWING No.

W5

REV.

00